


Push trolley | MLK | 500 - 5.000 kg

- The distance between the wheels is easy to adjust and can be used on many kinds of I-beams
- It can be driven in a small turning diameter
- The hinge links the left and right side plate to guarantee equal force
- It travels along the lower edge of the I-beam
- The wheels are ball-bearing for smooth operation
- Compact design, smaller body and lightweight for low headroom applications
- The trolley has an eye as attachment point

Type	MLK
Brand	Mitari
Temperature range	-10 °C to + 40 °C
Norm hoist	NEN-EN 12100-1/2
HS code	8716800000

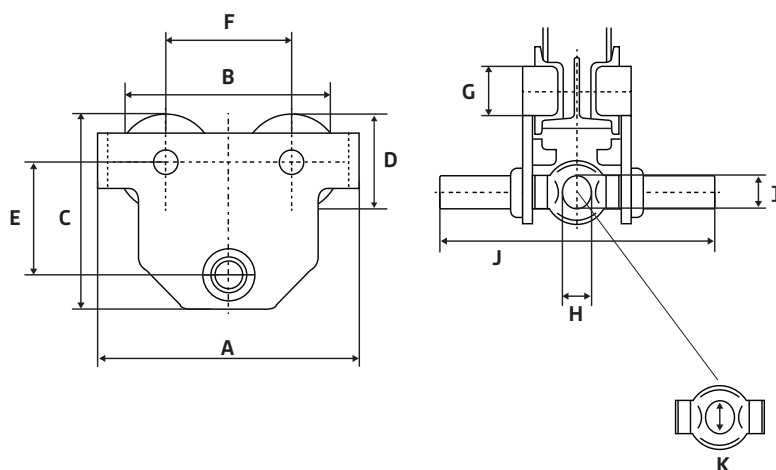

WLL kg	Beam Width mm	Min. radius curve m	A mm	B mm	C mm	Wheel D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	Weight kg
500	50 - 220	0.9	205	180	158	80	92	100	36	24	30	285	30	8.3
1.000	58 - 220	1	248	215	185	95	110	120	42	30	30	304	34	10.5
2.000	66 - 220	1.2	280	240	211	109	118	135	53	35	36	308	46	18
3.000	74 - 220	1.3	335	287	250	131	145	157	65	42	42	330	56	31
5.000	90 - 220	1.4	367	308	278	145	160	168	72	52	48	358	63	42.5