




Geared trolley | MGT | 1.000 - 5.000 kg

- The distance between the wheels is easy to adjust and can be used on many kinds of I-beams
- It can be driven in a small turning diameter
- The hinge links the left and right side plate to guarantee equal force
- It travels along the lower edge of the I-beam
- The wheels are ball-bearing for smooth operation
- Compact design, smaller body and lightweight for low headroom applications
- The trolley has an eye as attachment point
- Geared with a chain. Moving the trolley is easy by pulling on the chain to rotate the wheels

Type	MGT
Brand	Mitari
Temperature range	-10 °C to + 40 °C
Norm hoist	NEN-EN 12100-1/2
HS code	8716800000

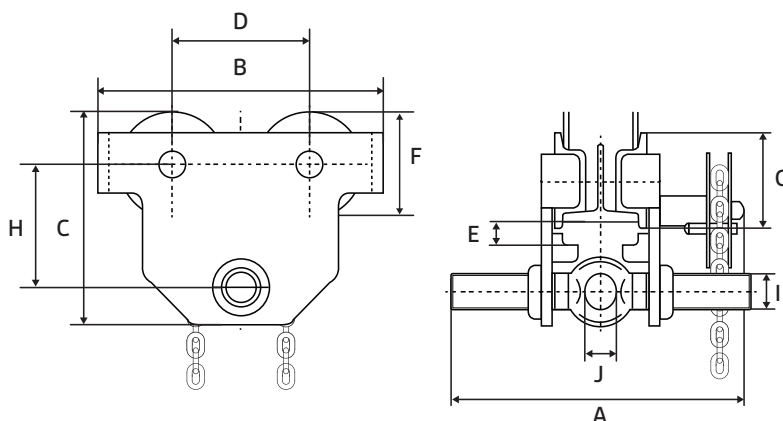

WLL kg	Beam width mm	Min. radius curve m	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	Weight kg
1.000	58 - 220	1	300	242	190	112	22	68	97	105	29	15
2.000	66 - 220	1.2	314	287	218	133	30	81	110	127	40	23
3.000	74 - 320	1.3	324	318	260	150	33	95	13	145	47	38
5.000	74 - 220	1.4	340	372	290	175	40	110	145	165	60	50