




## S Hooks | with latches | 50 - 5.000 kg

- Easy to handle, stable and wear-resistant
- S hooks with latches are forged in temperd steel class 8.
- They offer a safety factor of 4.
- S hooks have two latches and can be used as alternatives to shackles.
- The safety latch prevents loads or slings accidentally falling.
- These hooks have a WLL of 0.05 to 5 tons.
- Ideal for the paint or industrial assembly sectors. The hook with latch is ideal for routing parts in painting or shot-blasting booths or simply for storing various lifting accessories such as chain slings, wire rope slings and other parts.
- Legible individual marking is also included to enable WLL traceability

Type	SHOOK1259
Brand	Mitari
Safety factor	4:1
Material	Grade 80
Finish	Painted red
Norm	NEN-EN 1677-1, 2, 3, en 5
HS Code	7626909000

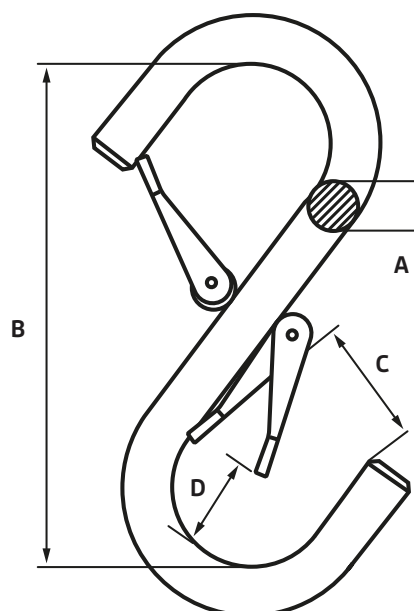

Type	WLL kg	A mm	B mm	C mm	D mm	Mass kg
1259A	50	6	80	20	15	0.05
1259B	100	8	80	20	15	0.08
1259C	200	10	80	17	20	0.12
1259D	300	14	100	23	20	0.3
1259E	500	16	130	32	22	0.52
1259F	750	18	160	42	27	0.8
1259G	1.000	20	180	48	37	1.1
1259H	1.250	22	200	51	38	1.25
1259J	1.500	26	220	55	50	2
1259K	2.000	32	260	70	56	3.65
1259L	3.000	36	320	84	65	5.7
1259M	4.000	40	360	103	76	8.5
1259N	5.000	45	400	110	84	12