


Connecting link | Sling | 1.400 - 10.000 kg

- **Connector for slings:** Featuring a flat section on one side, it minimizes damage to lifting slings or round slings, enhancing safety and reliability.
- **Durability:** The blue painted finish offers protection against corrosion, enhancing the link's longevity.
- **Optimal performance:** With a working load limit from 1,400 kg to 10,000 kg, the MYWX connecting link delivers superior performance in various lifting applications.
- **Grade 10 Material:** Constructed from high-grade materials, the MYWX link provides a safe and efficient solution for creating lifting assemblies, especially suitable for polyester assemblies.
- **Versatility:** Ideal for creating complex lifting assemblies or replacing single links without needing to change the entire chain assembly.
- **High safety standards:** Meets EN 1677-1, 4, and 6 norms, ensuring the highest safety standards.
- **Easy assembly:** The MYWX connecting link is designed for quick and easy assembly using just a hammer, ensuring a hassle-free setup.

Type	MYWX
WLL	1.400 - 10.000 kg
Chain size	6 - 16 mm
Brand	Mitari
Material	Grade 10
Finish	Painted blue
HS code	73269098
Safety factor	4:1
Norm	EN 1677-1, 4 and 6

MYWX Connecting link

Grade 100

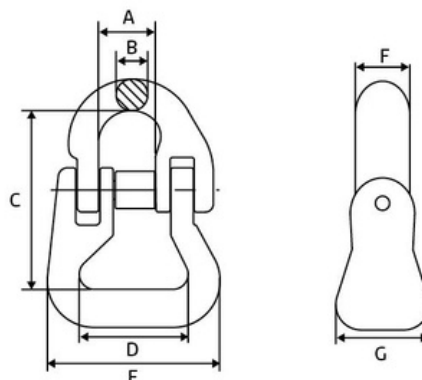

WLL kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg
1.400	16.91	8.42	55.11	39.64	61.60	8.44	18.96	0.20
2.500	21.95	11.20	65.12	40.69	65.76	10.54	23.76	0.35
4.000	26.04	12.99	77.54	48.28	76	12.76	30.16	0.55
6.700	32.31	16.88	92.55	52.28	93.13	17.82	34.74	1.20
10.000	38.58	20.52	115.13	70.02	109.31	20.03	43.81	1.95