




Containerhook | MKAX | 16.000 kg

- With the straight container hooks, you can only lift straight up. This is used in combination with an H frame. Four 1-legged chain slings are attached to the H frame to attach the container hooks to the H frame on four chains.
- The left and right container hooks allow you to lift the hooks at a 45° angle. These container hooks are often used in combination with a lifting equator with two two-legged chain slings. Two left container hooks are placed on one side of the container and two right container hooks on the other side.
- When installed, maintained and used, in accordance with the operating instructions and the rules of good workmanship, complies with the basic health and safety requirements of the EN 1677-1, -2, -3 and -5 standards

Type	MKAX
WLL	16.000 kg
Connection	Eye
Finish	Painted blue
Brand	Mitari
Material	Grade 10
HS code	7326909000
Norm	En 1677-1, -2, -3 and -5

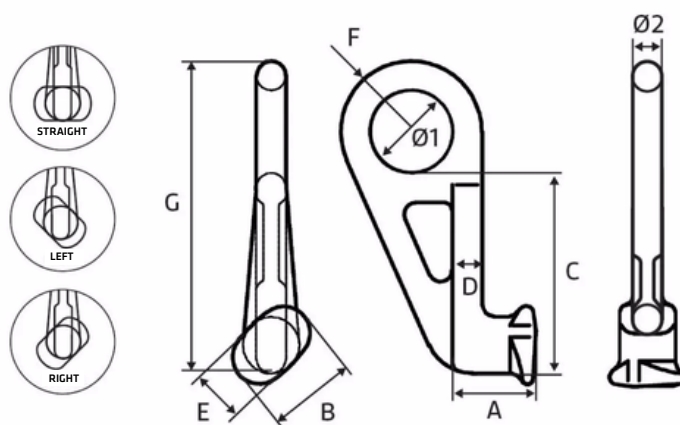

WLL kg	Angle	A mm	B mm	C mm	D mm	E mm	F mm	Ø1 mm	Ø2 mm	G mm	Weight kg
16.000	Straight	70	74	166	27	48	60	69	25	265	3.9
16.000	Left 45°	70	74	166	27	48	60	69	25	265	3.9
16.000	Right 45°	70	74	166	27	48	60	69	25	265	3.9