


Electric chain hoist | MCK | 3.000 - 5.000 kg

- The 400V electric chain hoist represents a perfect combination between a compact design and powerful engine work. We supply this powerhouse in 2 versions, 3.000 kg (1-part) and 5.000 kg (2-parts).
- The sturdy construction guarantees a long track record, reliability and low maintenance and service costs.
- We can compose these and lifting heights varying from 3.00 to 10.00 m.
- Lifting height available from 3 meters to 10 meters.
- High duty cycle and 2 lifting speeds
- Low voltage control (24 volt)
- Plastic chain magazine
- Galvanized lifting chain with CE certificate.

Type	MCK
Brand	Mitari
Chain falls	1
Hoist chain	6x18mm Electro-Galvanized T-hardened
Control chain	5x25mm Electro-Galvanized
Norm hoist chain	DIN-EN 10204 EN 818-7
Norm hoist	ISO 3077 EN818-7
HS code	8425190000

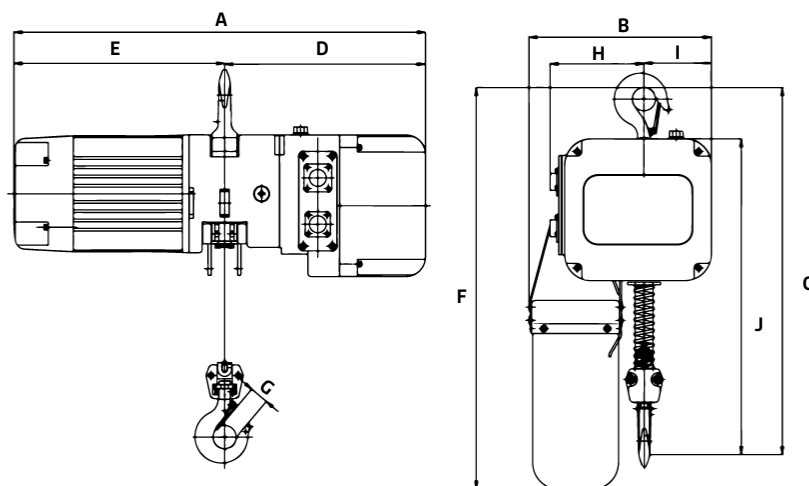

C mm	D mm	A mm			B mm	D mm			E mm			F mm	G mm	H mm	I mm	J mm
		Single speed	Dual speed	Inverter		Single speed	Dual speed	Inverter	Single speed	Dual Speed	Inverter					
595	780	694	720	694	430	336	336	336	358	384	358	780	45	185	165	487
860	870	694	720	694	430	336	336	336	358	384	358	870	61	240	110	665

WLL kg	Hoisting speed m/min.	Motor power kw	Duty rating jc%	Classification
3.000	6/2	3/1	60	M4
5.000	3.6/0.85	3/1	60	M4