


PRODUCTSHEET

TORQUE

SWIVEL LIFTING POINTS

Type: MWK



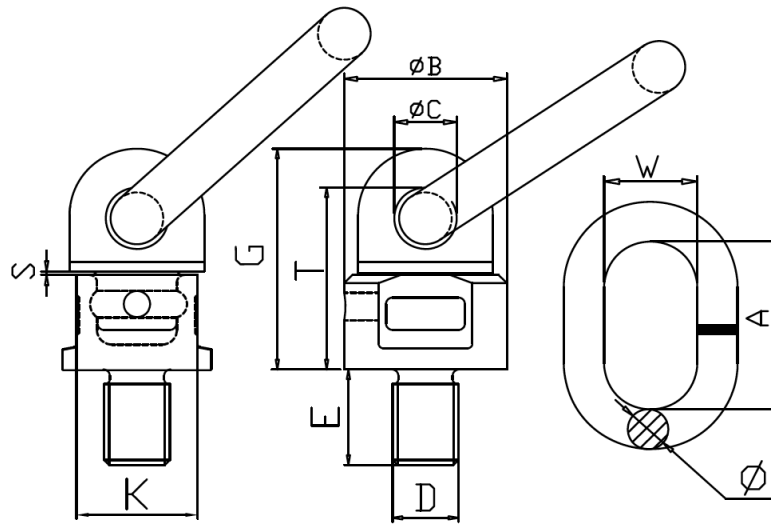

DXE	WEIGHT (KG)	WLL/T (4:1)		TORQUE (N.M)	B±1	C±1	G±2.5	T±2.5	A±3	W±3	Ø ±0.5	S	K±0.5
		90°	0°										
M8X13	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M8X18	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M8X20	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M8X23	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M8X30	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M8X32	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M8X43	0.45	0.3	0.6	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X10	0.45	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X15	0.45	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X18	0.45	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X20	0.45	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X20	0.45	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X27	0.46	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M10X90	0.5	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X18	0.46	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X30	0.47	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X31	0.47	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X40	0.47	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X45	0.48	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X50	0.48	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M12X110	0.54	0.5	1	10~15	36	16.5	51	41	55	30	14	0.5~1	30
M14X20	0.49	1.12	2.24	20~30	36	16.5	51	41	55	30	14	0.5~1	30
M16X20	0.47	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X24	0.48	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X30	0.49	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X35	0.49	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X40	0.5	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X50	0.52	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X80	0.57	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X100	0.6	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X120	0.63	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30
M16X300	0.91	1.12	2.24	20~30	36	16.5	51	42	55	30	14	0.5~1	30

DXE	WEIGHT (KG)	WLL/T (4:1)		TORQUE (N.M)	B±1	C±1	G±2.5	T±2.5	A±3	W±3	Ø ±0.5	S	K±0.5
		90°	0°										
M20X30	0.99	2	4	50~70	49.5	19	52	42	55	30	14	0.5~1	41
M20X43	1.02	2	4	50~70	49.5	19	52	42	55	30	14	0.5~1	41
M20X75	1.1	2	4	50~70	49.5	19	52	42	55	30	14	0.5~1	41
M20X80	1.12	2	4	50~70	49.5	19	52	42	55	30	14	0.5~1	41
M20X120	1.21	2	4	50~70	49.5	19	52	42	55	30	14	0.5~1	41
M24X30	1.33	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X36	1.35	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X40	1.36	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X45	1.38	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X50	1.4	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X90	1.54	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X120	1.65	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M24X300	2.29	3.15	6.3	130~160	57	22	78	65.5	85	40	18	0.5~1.5	46
M27X35	1.47	3.15	6.3	180~220	57	22	78	65.5	85	40	20	0.5~1.5	46
M30X35	2.3	5.3	10.6	200~250	66	23.5	96.5	80.5	85	40	20	0.5~1.5	54
M30X38	2.316	5.3	10.6	200~250	66	23.5	96.5	80.5	85	40	20	0.5~1.5	54
M30X45	2.355	5.3	10.6	200~250	66	23.5	96.5	80.5	85	40	20	0.5~1.5	54
M30X75	2.521	5.3	10.6	200~250	66	23.5	96.5	80.5	85	40	22	0.5~1.5	54
M30X120	2.771	5.3	10.6	200~250	66	23.5	96.5	80.5	85	40	22	0.5~1.5	54
M30X160	2.993	5.3	10.6	200~250	66	23.5	96.5	80.5	85	40	22	0.5~1.5	54
M30X35	3.73	8	12.8	200~250	80	28	112	92	115	50	22	0.6~2	64
M30X38	3.75	8	12.8	200~250	80	28	112	92	115	50	22	0.6~2	64
M30X120	4.21	8	12.8	200~250	80	28	112	92	115	50	22	0.6~2	64
M36X50	3.875	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X90	4.194	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X120	4.497	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X140	4.593	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X160	4.753	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X220	5.232	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X300	5.871	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M36X400	6.67	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	64
M39X50	3.944	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	65
M39X90	4.319	8	12.8	280~400	80	27	109	89.5	115	50	22	0.6~2	65
M42X50	4.455	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M42X60	4.564	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M42X63	4.596	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M42X130	5.325	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M42X160	5.651	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M42X180	5.868	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M45X60	4.7	10	16	500~600	80	27	109	89.5	115	50	22	1~2.5	65
M48X50	4.621	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M48X60	4.763	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M48X70	4.905	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M48X72	4.934	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M48X110	5.473	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M48X160	6.183	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M48X245	7.39	10	16	500~650	80	27	109	89.5	115	50	22	1~2.5	65
M56X84	11.8	15	24	600~900	117	42	246	214	152	70	32	1~2.5	95
M64X95	12.5	15	24	600~900	117	42	257	225	152	70	32	1~2.5	95

MITARI®

mitari.nl
info@mitari.nl



Copyright © 2024 Mitari

