


Pallet fork | MPE.GAL | 1.500 - 3.000 kg

- **Adjustable height:** Height can be adjusted in 125 mm increments, up to a maximum useful height of 1,700 mm, making it suitable for different load sizes.
- **Manual balance adjustment:** Balance is set manually via the top shackle, ensuring stable and safe lifting.
- **Flexible forks:** Forks are adjustable in width with a quick screw system, suitable for both pallets and rolls.
- **Standard fork length:** Supplied with 1-meter forks for versatile lifting applications.
- **High safety factor:** Built with a 4:1 safety factor and produced in full compliance with CE standards.
- **Durable finish:** Galvanized (zinc-coated) steel offers long-lasting resistance to corrosion and wear.
- **Load capacity options:** Available in 1,500 kg, 2,500 kg, and 3,000 kg WLL versions.
- **Safety note:** For safe use, the load must not exceed the fork length.

Type	MPE.GAL
WLL	1.500 - 3.000 kg
Brand	Mitari
Material	Various steels
Finish	Galvanised
HS code	7326909000
Safety factor	4:1

MPE Crane Fork

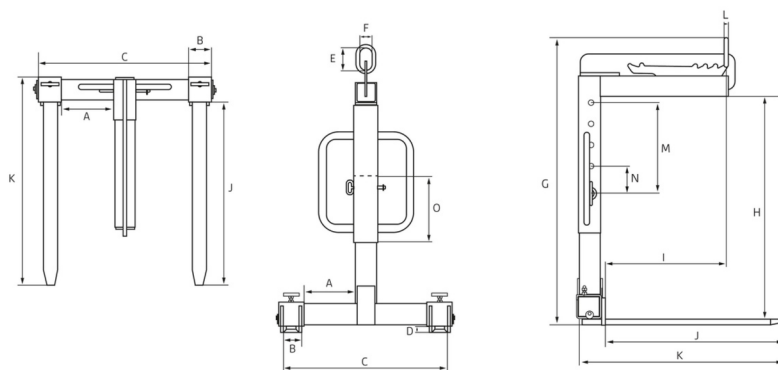

WLL kg	A mm	B mm	C mm	D mm	E mm	F mm	max. G mm	max. H mm	I mm	J mm	K mm	L mm	M mm	N mm	O mm
1.500	326	80	962	40	140	80	2122	1772	668.50	1060	1200	17	500	125	400
2.000	310	80	950	40	140	80	2142	1792	668.50	1060	1220	17	500	125	
2.500	316	80	962	40	140	80	2142	1772	720.5	1060	1220	17	500	125	
3.000	316	100	982	40	140	80	2142	1772	720.5	1055	1215	17	500	125	