


Shortening Set | Pin hook | 2.500 - 10.000 kg

- **Secure chain shortening with locking:** The Mitari IKSGB insert set with chain and locking allows safe and controlled shortening of lifting chains. The integrated locking mechanism prevents the chain from slipping out, ensuring maximum security during lifting operations.
- **Full-length positioning:** The set can be positioned anywhere along the chain, offering high flexibility and ease of use in a wide range of lifting configurations.
- **Robust clevis connection:** Fitted with a clevis connection for stable and reliable attachment, maintaining secure performance under load.
- **Grade 10 steel construction:** Manufactured from high-strength Grade 10 alloy steel for excellent durability and long service life. The blue coated finish improves corrosion resistance and visibility on-site.
- **Certified safety & compliance:** With a Working Load Limit from 2,500 kg to 10,000 kg, a 4:1 safety factor, and full compliance with EN 818 and EN 1677 standards, this shortening set is built for professional industrial lifting applications.

Type	IKSGB
WLL	2.500 - 10.000 kg
Suspension	Shortening hook with pin
Brand	Mitari
Material	Grade 10
Finish	Painted blue
HS code	7326909000
Safety factor	4:1
Norm	EN 818-1 to 7 & EN 1677-1,-2,-3,-5

IKSGB Chain shortening set

Incl. lock pin

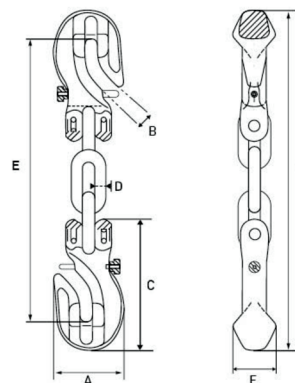

WLL kg	Ketting mm	A mm	B mm	C mm	E mm	F mm	G mm	Gewicht kg
2.500	8	58	10	109	204	35.5	290	1.90
4.000	10	71.6	13	134	250	44	358	3.60
6.700	13	96	17	175.5	331	56	468	6.90
10.000	16	107	19	208	402	65	560	9.3